


Plug-In Microphone PM-500



Plug-in Microphone with 3.5mm connector

Frequency Response Curve

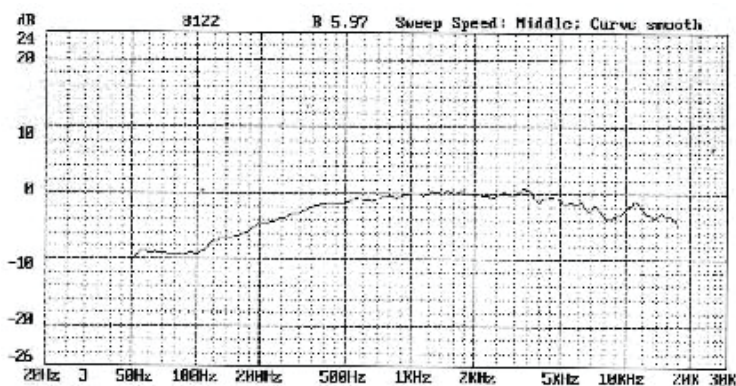

Polar Pattern



Specifications

Element	Electret-Condenser
Directional Characteristics	Uni-directional
Frequency	70 Hz ~ 16,000 Hz
Impedance	600 30% (at 1000 Hz)
Sensitivity	1,400 Ohms \pm 30%
Operating Voltage	DC 1.5V – 10V (RL: 600 Ω)
Connector	3.5mm Phone
Dimensions	9/16" Dia x 1 7/16" L
Weight	1 oz

Features

- Comes standard with Crescent transmitter
- Plus into Crescent, Pendant and Body-Pack transmitters